


APPENDIX C

TREE PROTECTION DETAIL

NOT TO SCALE

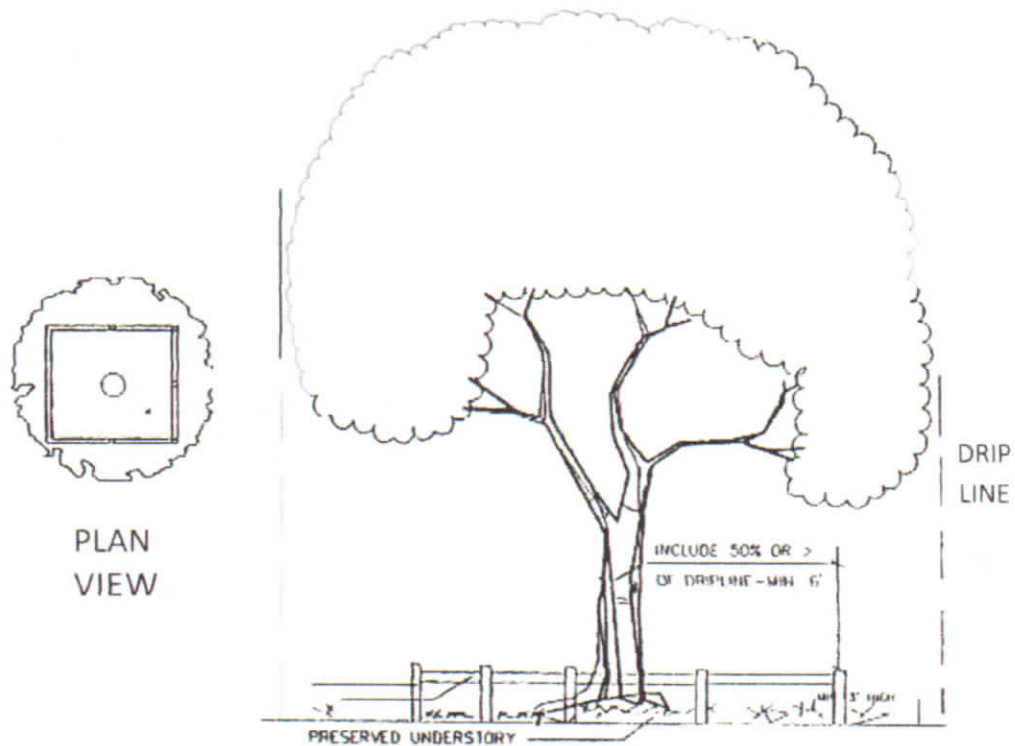

Notes to Contractor:

1. Barrier placed around tree shall include 50% of Dripline area.
2. 2"x4" Posts, 8' O.C. with 2"x 4" railings or wire mesh fencing.
3. Required tree protection barricades must remain intact throughout construction. Encroachment into or failure to maintain tree barricades will result in enforcement action.
4. No filling, excavation, tree removal, construction, clearing or machinery will be permitted within the natural buffers except as permitted due to its significant ecological and landscape values.